



ROUNDIT® EMI FMJ Full Metal Jacket


Product Highlights

- Operating temperature from -60°C to +200°C (-76°F to +392°F)
- High Performance EMI Shielding
 - R_o max = 5 mΩ
 - L_t = 0.6 nH
- Far Part 25.853
- Halogen-free
- Self-wrapping design
- Fast and easy installation
- Stable construction
- Ideal for reworking components without disconnecting them
- Tracer indicating the maximum operating diameter



Our manufacturing sites are certified ISO 9000, QS 9000 or ISO/TS 16949 and ISO 14001

RIEMIFMJ_10072009

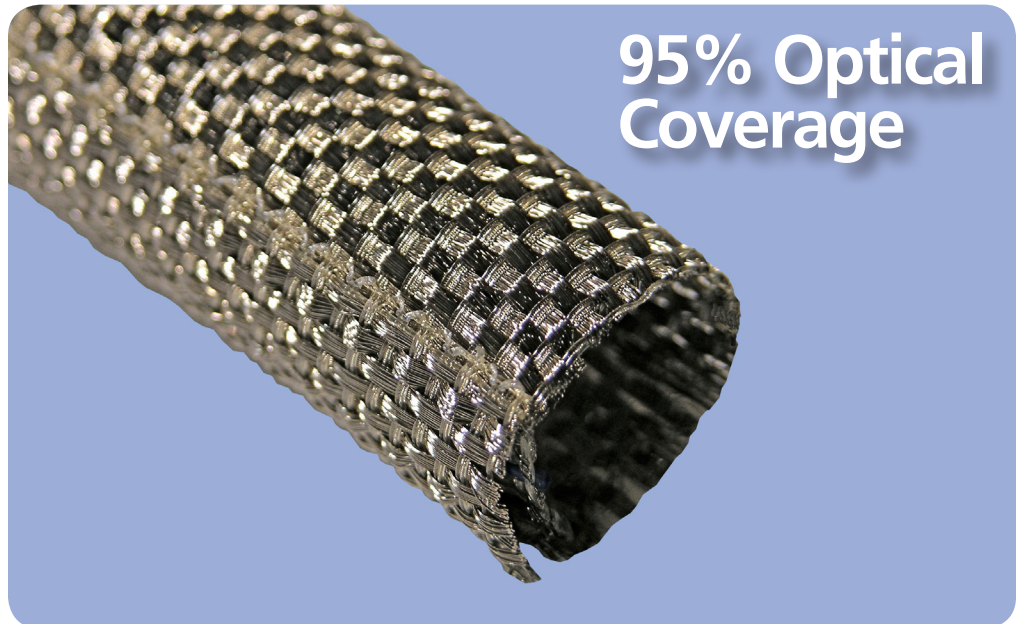

ROUNDIT® EMI FMJ (Full Metal Jacket) is a wrap-around sleeving designed for high-performance EMI shielding of wire and cable bundles. ROUNDIT EMI FMJ is manufactured from PPS monofilaments and nickel plated copper.

The self-wrapping feature of ROUNDIT EMI FMJ allows for quick and easy installation and removal of the product for assembly and maintenance.

The design offers innovative solutions to the protection of breakout areas and also provides ease of removal when inspection or maintenance of cables is necessary.

The stable construction guarantees the same level of EMI shielding regardless of the diameter on which it is installed within the recommended application range.

As an additional benefit, ROUNDIT EMI FMJ enables users to stock a limited range of sizes to cover a wide range of cable and wire diameters.

Thanks to its unique geometry and metal insertion, ROUNDIT EMI FMJ is easy to clamp with existing solutions.

ROUNDIT EMI FMJ has many applications in the aeronautical, space and military industries.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.

BentleyHarris®
Protection Products

Performance Data – ROUNDIT® EMI FMJ

Property	Test Method	Result
PHYSICAL		
Operating temperature range	Thermal endurance & shocks	-60°C to +200°C
Rapid change of temperature	EN 2591-305	Pass
Flammability/smoke density/toxicity	FAR Part 25 § 853 & ABD 031 NF16101-16102	Conforms I3 F0
MECHANICAL		
Dynamic cut-through	EN 6059 Part 405	Pass
Bending	EN 6059 Part 402	Pass
Hard Vacuum	ASTM E-595	Meets industry standards
Total Mass Loss (TML)		0.03%
Collected Volatile Condensable Material (CVCM)		0.01%
Water Vapor Recovery (WVR)		0.02%
CHEMICAL		
Fluid Resistance Jet Fuel: JP4 (NATO F44) Hydraulic Fluid: Skydrol 500 B4 Mineral Oil: MIL-L-7870A Synthetic Oil: MIL-L-23699 Cleaning fluids: MIL-L87936 De-Icing Fluid: MIL-A-8243	EN 6059-303	Pass
Salt spray resistance	EN 2591-307 – 96 hours	Pass
Mould Growth	EN 6059 Part 306	Pass
EMI PERFORMANCE		
Resistance Measurement EN 3475-301 Ro max size 8 - 5.5 mΩ Ro max other sizes - 5 mΩ	<p>Transfer Impedance Measurement</p> <p>Legend: — Size 8 — Size 13 — Size 19 — Size 25</p> <p>Y-axis: Zt (ohms/m) from 1.0E-03 to 1.0E+00 X-axis: Frequency (Hz) from 1.0E+04 to 1.0E+08 Right Y-axis: Shielding Effectiveness in dB/m. Scale According to EIC01196-1 (Z01 = 202 = 50 ohms) from -100 to -40</p>	
Transfer Impedance IEC 60096-1 Triaxial method on straight installation Lt = 0.6 nH		
Lightning	EN 2591-214 – Waveform 1 10KA	Pass

Product Specifications

Commercial Part Number	Recommended App. Range mm (in)		Max Weight g/m (lbs/ft)	Max Backshell Diameter mm (in)	Standard Packaging m (ft)
	Min Ø	Max Ø			
ROUNDIT EMI FMJ 8-8	5 (3/16")	8 (5/16")	41 (0.028)	10 (3/8")	100 (328')
ROUNDIT EMI FMJ 13-8	8 (5/16")	13 (1/2")	59 (0.040)	16 (5/8")	50 (164')
ROUNDIT EMI FMJ 19-8	13 (1/2")	19 (3/4")	86 (0.058)	23 (7/8")	25 (82')
ROUNDIT EMI FMJ 25-8	19 (3/4")	25 (1")	110 (0.074)	31 (1-1/4")	25 (82')
ROUNDIT EMI FMJ 32-8	25 (1")	32 (1-1/4")	145 (0.097)	40 (1-9/16")	25 (82')
ROUNDIT EMI FMJ 38-8	32 (1-1/4")	38 (1-1/2")	172 (0.116)	47 (1-27/32")	25 (82')

Part Numbering System

Example	Product Name	Size	Color	Quantity
	ROUNDIT EMI FMJ	8	8 (Light gray)	100 m

The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard term of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.

©2009 Federal-Mogul Systems Protection, manufacturer of Bentley-Harris protection products.



USA: (1) 800 926 2472
 Europe: (33) 3 44 39 06 06
 Japan: (81) 45 938 8711
 China: (86) 21 5588 0898

www.federalmogul.com/sp